

FLUSH MODULAR GOLD FOOD COUNTER




X-STREAMLINE™

Item #: _____ Quantity: _____

Project: _____

Create a custom look with unique interlocking modules!

OPTIONS & ACCESSORIES

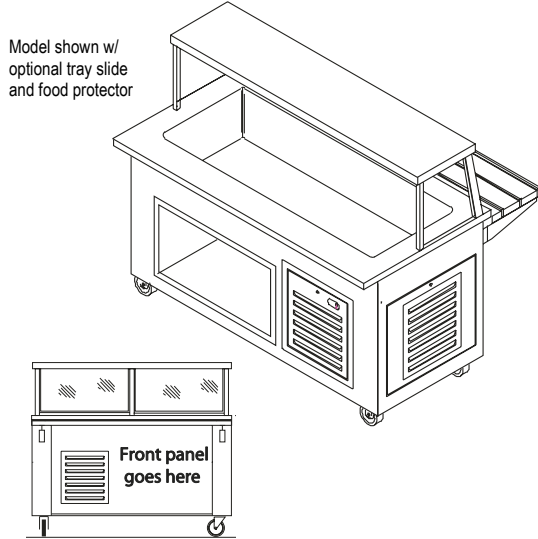

MODELS

- | | | | |
|-----------------------------------|--------------------|--------------------------------------|--------------------|
| <input type="checkbox"/> CLSX-F-2 | 2 pans, 36" | <input type="checkbox"/> CLSX-F-5 | 5 pans, 74" |
| <input type="checkbox"/> CLSX-F-3 | 3 pans, 50" | <input type="checkbox"/> CLSX-F-5-84 | 5 pans, 84" |
| <input type="checkbox"/> CLSX-F-4 | 4 pans, 60" | <input type="checkbox"/> CLSX-F-2 | 6 pans, 96" |

- ▶ 6 standard sizes Available
- ▶ **Heavy duty, 14 gauge stainless steel countertops standard.**
- ▶ Interchangeable front panels create decorative interaction stations
- ▶ Optional laminated exterior body panels in lieu of recessed graphic panel.
- ▶ Available in 2-6 pan models
- ▶ Cold pans meet NSF7 with pans FLUSH with top
- ▶ Easy to clean, 1/4" tempered glass food shields eliminates scratching and cloudiness
- ▶ 6" heavy duty casters with brakes standard
- ▶ Leveling CAM locks at top corners
- ▶ 8'-0" cord and plug (standard)

Countertop

- 36" high (standard)
- Other height, Specify: _____
- Recess for 18" x 26" pans
- Solid surface countertop Specify: _____

Service Type

- Operator Service
- Self Service
- Two-sided (Island/buffet)

Counter Exterior

- Removable graphic panel w/ stainless steel ends (standard) (Refer to accessory chart for graphics and color choices)
- Laminated front and ends

Tray Slide Options

- 12" stainless steel "V" ridge tray slide
- 12" flat stainless steel tray slide
- Continuous top extension (in lieu of separate tray slide) Specify width: _____
- Solid surface tray slide Specify: _____

Kick Plates & Casters

- 6" casters (standard)
- 6" adjustable stainless steel leg
- Stainless steel kickplate
- Powder coated kickplate Verify R.A.L. Color _____

Food Protector Style

- SS (standard)
- FS
- VG Captur™
- M
- Other Specify: _____

Display Shelves

- Single glass display shelf
- Two tier glass display shelf

Food Protector Options

- Stainless steel (standard)
- Powder coat finish Verify R.A.L. color _____
- LED lights
- Fluorescent lights

Operator Work Ledge

- Richlite™ carving board on fixed brackets _____ 5" wide or _____ 8" wide
- Richlite™ carving board w/ fold down brackets _____ 5" or _____ 8" wide
- Stainless steel work ledge with fold down brackets _____ 5" or _____ 8" wide

Under Counter Options

- Stainless steel storage compartment (standard)
- Hinged doors
- Sliding doors
- Door locks

Additional Options

- Tray dispenser
- Plate dispenser
- Stainless steel overshelf
- Grommet holes for power cords/utility services
- Bread storage well
- Other Specify: _____

Electrical Options

- Duplex outlet, flush
- Duplex outlet, pedestal
- Daisy chain for wiring multiple units together
- Electrical load center
- Other Specify: _____

Signage Package

- Counter mounted
- Floor model
- Ceiling/wall mounted
- Other Specify: _____ (consult factory for sign options)






X-STREAMLINE™

FLUSH MODULAR COLD FOOD COUNTER

Food pans install flush to top

Item #: _____

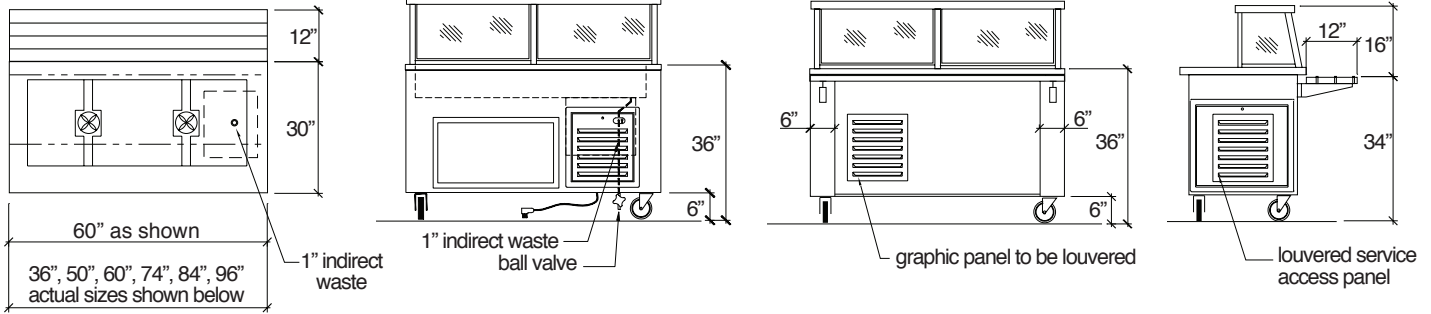

Plan View ↑

Rear View ↑

Front View ↑

End View ↑

Model	30" Width X Length	Cold pan length	Storage Compartment length	Comp	No. of pans	120V, 1 phase		Approx. weight
						AMPS	NEMA	
☐ CLSX-F-2	36 3/8"	25"	n/a	1/3	2	7.6	5-15P	400 lbs
☐ CLSX-F-3	50 3/8"	38"	15"	1/3	3	7.6	5-15P	450 lbs
☐ CLSX-F-4	60 3/8"	51"	28"	1/3	4	8.5	5-15P	580 lbs
☐ CLSX-F-5	74 3/8"	51"	28"	1/3	5	8.5	5-15P	600 lbs
*☐ CLSX-F-5-84	84 3/8"	64"	46"	1/3	5	8.5	5-15P	700 lbs
☐ CLSX-F-6	96 3/8"	77"	(2) 28"	1/2	6	12	5-15P	750 lbs

* 84" unit has 5 wells but provides additional counter space **Mechanical requirements may change depending on options chosen.

Specifications: Short Form

Provide Multiteria Model # _____ to be constructed with 14 gauge, heavy duty welded stainless steel top. The body to be 18 gauge stainless steel unitized construction. The front panel shall be easily removable and replaceable allowing front service access. Storage compartment comes standard with unit. Counter is mounted on 6" ball bearing, swivel type casters with brakes on all wheels. All units to be provided standard with 8' long cord and plug.

Specifications: Detailed

Counter body is unitized type construction and is of 18 gauge stainless steel with overlapping corners welded in place. Body is reinforced with 12 gauge vertical galvanized steel channel supports.

Front décor panels:

Panels to be 1/2" Sintra board with laminated vinyl graphic print. Panels shall be colorful and interactive in design and shall be easily removable and replace-

able allowing front service access. A stainless steel front panel is available at no additional cost.

Counter Top:

Top to be 30" wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and all edges having #7 highlight finish.

Cold Pan:

Cold pan to be 18 gauge stainless steel fully welded construction with 1/4" coved corners. The cold pan shall be pitched to a 1" drain with screen, which is extended to a ball valve below the base. All cold pans shall be furnished with urethane insulation on bottom and all four sides of pan. The pan shall be fully separated from the counter top by a full-perimeter breaker strip. Cold pan to accommodate full steam table pan 6" deep. Cold pan shall be 9" deep and include a patented forced air refrigeration system

(hermetic) with built in condensate evaporator. Cold pan includes low velocity fans and an advanced cold wall design operating on R-507 refrigerant. **Cold pan will meet or exceed NSF-7 standards while allowing food pans to remain flush to the counter top.**

Storage Compartment:

Storage compartment is made of 18 gauge stainless steel. Liner to have coved corners and removable top panels to allow for service access.

Casters:

Counter is mounted on 6" diameter, ball bearing and swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted through two 12 gauge channels for extra rigidity.



Due to continuing product improvement, units and specifications are subject to change without notice.

(3/2010)